

DYNA-FOG®

ULV APPLICATIONS

DYNA-FOG ULTRA LOW VOLUME (ULV) cold aerosol spray mist applicators feature full benefit of ULV method of dispensing water or oil based chemical formulation. Dyna-Fog, with 25 years of experience in aerosol application technology, delivers all the tools & data necessary to accurately determine the dispersal of flow rate & particle size. No more guess work. Dyna-Fog ULV can accurately dispose droplets in range of 5 to 50 microns. The high power two stage blower provides maximum thrust, which guarantees the accurate reach of the droplets.



HURRICANE ULTRA

The Hurricane is ideal for spraying in industrial and domestic areas. Hurricane fitted with 3 sonic ULV Nozzles gives you droplet sizes, which control for both ULV spraying and residual spraying.



CYCLONE ULTRA

The Cyclone ULV ideal machine designed to handle precision spraying works, the ultra precision metering valve assures ULV particles under 20 microns regardless of the flow rate.



TORNADO

The multi range Tornado offers 12 litre tank, large formulation filter with removable screen and precision control metering valve that allows adjustable output from heavy misting of 18 Litre per hour to low output in the ULV range.

- ◆ Engineered to meet the most demanding dispensing needs ◆
- ◆ With options to satisfy a variety of application requirements ◆

DYNA-FOG®

ULV APPLICATIONS

Depending on your requirement you select the appropriate model for your application. With Dyna Fog ULV applicators, you can apply:

- Disinfectant in Hospitals, Pharmaceutical Food & Beverages Plants.
- Pesticides in Home, Office, Green House.
- Deodorants in Home, Hotels, Auditorium Hall.
- Pest Control Operations.
- Humidification in Textile Industries, Poultry House, Mushroom Cultivation.

Standard Features in all our models


- Multipurpose use works on both oil/water based Formulations.
- Chemicals Resistant tank and spray head.
- 2 Stage Blower motor provides maximum thrust of spary.
- Graduated marking on formulation tank.
- Full instructive manual.
- Supplied with viscosity meter.
- 1 year limited warranty.

SPECIFICATIONS

	Hurricane Ultra	Cyclone Ultra	Tornado
Model No.	2795	2736	2897
Power Input	210 / 250 volt AC	210/250 volt AC	210/250 volt AC
	3.4 amps	4.2 amps	4.2 amps
Flow Rate/L.P.H	0 to 17	0 to 18.6	0 to 18.5
Particle Size - Microns (MMD)	10 to 50	5 to 20	5 to 40
Tank Capacity	3.8 Litres	3.8 Litres	12 Litres
Weight Empty	3.0 kg	4.2 kg	9.1 kg

Dyna-Fog products comply with CSA C22.2# 68-96 Canada. CSA HRT/C (USA/Canada). CE standards of European Union.

Also available in Hurricane & Cyclone Multiple Hook Float Valve Version Which regulates input of water and water level.

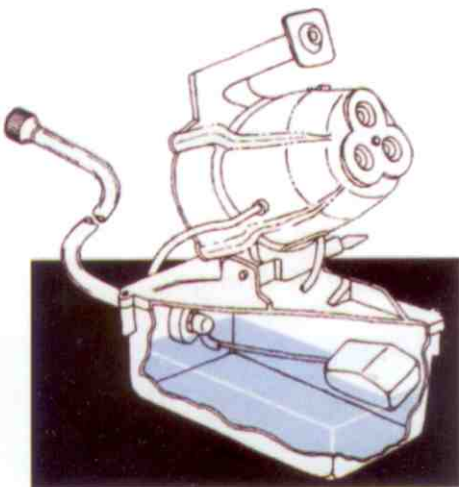

Made in USA by
CURTIS DYNA FOG LTD. USA.
Marketed in India:

 **FOGGERS
INDIA
PVT. LTD.**

Local Distributor / Dealer

 **SCIENTIFIC
Systems & Chemicals**

MIG-5/1, Amer Complex,
1st Floor, Zone-II, M.P. Nagar,
Bhopal- 462011 (M.P.)
Telefax : 0755-2762929, 4282929
e-mail: ssc@mantrafreenet.com
ssc.bpl@airtelbroadband.in